

Sistem transport siloz

STORM PLUS

Echipe standard:

- Cadru cu roti, manere si carlig de ridicare
- Compresor C-DLR 140
- Senzor distanta cu cablu de 50 m
- Unitate transport cu supapa pneumatica
- 3 furtunuri de aer pentru conexiune compresor, supapa si siloz
- Tubulatura material, Ø45 mm cuplaje Geka 4 x 12.5 m



Optional:

- Suflanta ventilator
- Suflanta ventilator cu extensie Hopper
- Furtun material 20 m cuplaj Storz
- Cablu electric de alimentare pentru Storm Plus
- Extensie cablu electric pentru senzor 50 m
- Contor ore



STORM PLUS

Grad protectie IP panou electric	IP 44
Tensiune alimentare / Frecventa	400 V / 50 Hz
Putere motor	7,5 kW
Amperaj	14 A
Debit compresor	120 m ³ /h
Presiune maxima	3,8 bar
Distanta maxima (2)	150 m
Debit maxim (2)	2000 kg/h
Greutate compresor	163 kg
Greutate unitate control	15 kg
Greutate incarcare - mod. Plus (la cerere)	21 kg
Greutate sonda	2 kg
Greutatea cablului sondei	5 kg
Greutatea celor 3 tuburi de aer	39 kg
Nivel zgomot	92 dB
Greutate echipament	245 kg
Dimensiuni (LxIxh)	1150x765x956

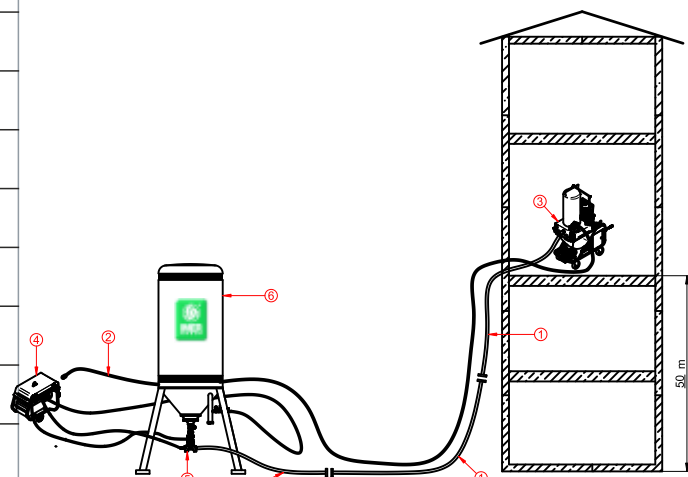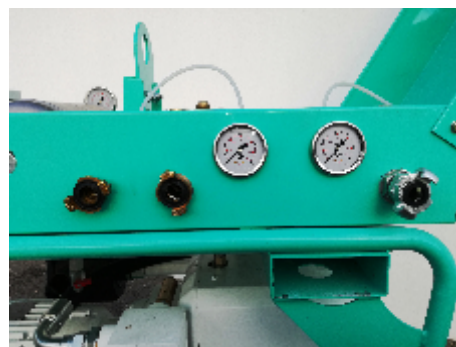

- 1 - Material furtun DN50 20m
- 2 - Cablu pentru sonda mixer 50m
- 3 - Suflanta standard
- 4 - Storm Plus
- 5 - Supapa pneumatica DN 50
- 6 - Siloz 5m

(1) Digit (4) = protectie anti praf – 2nd digit (4) = protectie anti jeturi apa

(2) In functie de caracteristicile produselor folosite, precum si de inaltimea, sectiunea si lungimea tubului



www.italiastar.ro

**SOLICITA ACUM
OFERTA
PERSONALIZATA!**

Italia Star Com Due S.R.L.
Autostrada București - Pitești km. 13.2
Loc. Chiajna - Ilfov
Tel: 021.433.03.27
Fax: 021.433.03.26
info@italiastar.ro www.italiastar.ro